


American-made products since 1970

## Schedule 40 & 80 Rigid PVC Conduit

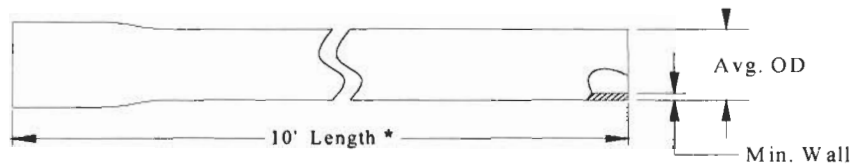

National Pipe & Plastics Schedule 40 & 80 Heavy Wall PVC Conduit is manufactured in accordance with UL 651, ANSI/NEMA TC-2, and meets the requirements Federal Military Specification WC-1094A and Article 352 of the National Electrical Code. National Pipe & Plastics' PVC electrical conduit is manufactured from a compound with a cell classification 12123 as defined in ASTM Standard D-1784.

Uses include aboveground, exposed, underground and concrete encasement applications. National Pipe and Plastics conduit is 90° wire rated and sunlight resistant. All sizes come in both 10' and 20' lengths with an integral bell on one end.

Conduit is also available in Orange and Red colors, and CSA listed Only

- U.L. Listed
- Sunlight resistant
- Rated for use with 90° C conductors



NOM. SIZE	METRIC DES.	AVG. O.D.	MIN. WALL		Wt. Per 100 Feet		Feet Per Bundle	MIN. Socket Depth
			SCH 40	SCH 80	SCH 40	SCH 80		
1/2	16	.840	.109	.147	17	21	6000	2.000
3/4	21	1.050	.113	.154	23	29	4400	2.000
1	27	1.315	.133	.179	33	42	3600	2.500
1 1/4	35	1.660	.140	.191	45	58	3300	3.000
1 1/2	41	1.900	.145	.200	53	70	2250	3.000
2	53	2.375	.154	.218	71	97	1400	3.500
2 1/2	63	2.875	.203	.276	112	148	930	3.500
3	78	3.500	.216	.300	147	198	880	4.000
3 1/2	91	4.000	.226	N/A	177	N/A	630	3.500
4	103	4.500	.237	.337	209	289	570	4.750
5	129	5.563	.258	.375	283	403	380	4.000
6	155	6.625	.280	.432	367	563	260	5.000

\* Rigid non-metallic conduit is normally supplied in standard 10' lengths with one belled end per length. For specific requirements, it may be produced in lengths shorter or longer than 10', with or without a bell.

\*\* CSA Certification applies only to "Schedule 40 Conduit" manufactured in New York.