




NATIONAL PIPE & PLASTICS, INC.

COMM-DUCT

PVC Telecommunications Duct

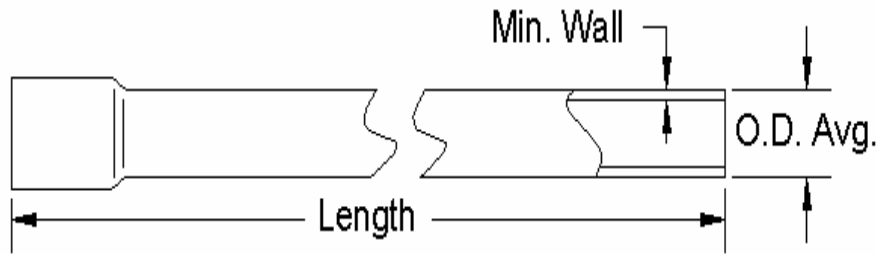

National PVC COMM-DUCT is manufactured from virgin PVC compounds with a cell class of 12454-B as determined by ASTM D-1784. Our COMM-DUCT is subjected to in-process quality control inspections to assure compliance with the appropriate manufacturing and performance standards listed below:

- ASTM Standard D-1784
- ASTM Standard D-1785
- National Electrical Manufacturers Association (NEMA) TC-2

Nominal Size	O. D. Average	Wall Minimum	Avg. Bell Depth	Overall Length
2"	2.375	.154	2.500	20' 3"
3"	3.500	.216	3.75	20' 4"
4"	4.500	.237	4.25	20' 4-1/2"

Note: This COMM-DUCT comes with an extra deep integral bell socket and is suitable for either direct burial or concrete encasement. The 2" nominal size is utilized in our QUAD-DUCT system which is intended for use in fiber optic cable, coaxial cable, and small diameter cable installations.